

DRAFT #~~5~~6

(This version shows changes made following the Joint Workshop and the Hacienda Task Force Meeting of January 6, 2011)

~~Pleasanton~~ Hacienda TOD Standards and Design Guidelines

January 21, 2011

Prepared for:
City of Pleasanton

Prepared by:

TransACT
Van Meter Williams Pollack



TABLE OF CONTENTS:

1.	Introduction	5
	A. Purpose	5
	B. Vision Statement	6
	C. TOD Framework	7
2.	PUD Regulations	12
	A. Core PUD Regulations	12
	B. Non-Core PUD Regulations	13
	C. Retail and Live/work Requirements	14
	D. Permitted Uses	15
3.	Development Standards and Design Guidelines	16
	A. Streets	16
	B. Site Planning	22
	C. Building Types	33
	D. Architectural Features	45
4.	Process	49
5.	Appendix	50
	A. 18.84.170 Usable Open Space	50

PART 1

Introduction

A. PURPOSE

These Transit Oriented Development (TOD) Mixed Use Development Standards and Guidelines are to be used to evaluate mixed use and residential development in Hacienda in concert with the Hacienda Planned Unit Development (PUD) regulations, Design Guidelines, and Covenants, Conditions and Restrictions. The intent is to promote a building character, street scale and street-level uses that will allow the incremental development of a TOD “village”, encourage pedestrian activity and promote easy access to the BART station. The development of these three vacant sites, in the midst of the Hacienda Business Park, will contribute to a complete and integrated community containing housing, shops, work places, schools, parks and civic facilities essential to the daily life of residents and employees.

The Standards and Guidelines provide direction to developers and property owners on the key components of use, density, building mass and height, setbacks, architectural features, parking, access, and street character. The Standards and Guidelines illustrate desired development on three specific vacant sites near the BART station in Hacienda (Sites 7G, 7E and the northern 12 acres of Site 6 as referenced in the Hacienda PUD and referred to as Sites 1, 2 and 3 respectively in this document). The potential for additional residential development in Hacienda outside Sites 1,2 and 3 will be determined through the Housing Element Update process.

Where there are conflicts between these Standard and Regulations and those included in the previously adopted Hacienda regulations, these Standards and Regulations shall be applied to mixed use and residential development applications.

The Core PUD Regulations found in Part 2 of this document apply only to Sites- 1,2 and 3. Compliance with these regulations is mandatory and is required as part of the Final Settlement Agreement approved by the Pleasanton City Council in the matter of Urban Habitat v. City of Pleasanton.

In regard to the balance of the standards and guidelines in this document, both quantitative and qualitative criteria have been incorporated. To enable greater flexibility and creativity, the City Council may approve proposals that exceed the identified numeric ranges if they determine that such proposals are consistent with the purpose of these standards and guidelines.

Review Process

All development applications for sites 1, 2 and 3 will be reviewed by the City through the Planned Unit Development (PUD) process, which will include review and recommendation by the Planning Commission and approval or denial by the City Council at noticed public hearings. Subsequent amendments to approved development plans, if determined to be minor after public notification, may be approved by the Community Development Director but are appealable to the Planning Commission and City Council. Major amendments will require additional review, public hearing and approval by the City Council. Although development project on sites 1, 2 and 3 will be required to meet all the Core Standards, the City Council may exercise discretion in the application of the other development standards contained in this document, if such proposals meet the intent and purpose of the standards. As is typical with all design guidelines, some flexibility is warranted where specific circumstances would make application of the guideline infeasible and/or undesirable, and where an alternative proposal fits with the Vision and intent expressed in this document.

B. VISION STATEMENT

The Hacienda Task Force puts forward the following vision statement to compliment the attached development standards and design guidelines. This vision provides direction to property owners and associated developers on the City's planning intent. This vision statement must be translated by the property owners when preparing a proposed project for consideration by the City.

Vision Statement:

The livability of these development sites is paramount. These future developments not only address housing needs for families of all incomes and ages, and also provide a supply of workforce housing in the City to accommodate mandated Regional Housing Need Allocations by the State of California.

We desire to build a neighborhood with several amenities for future residents and the existing community to enjoy. Simply put, it must be a very nice place to live.

The developments should be situated in an attractively designed landscaped environment with ample open space, play areas, trail connections, pedestrian amenities, pool area, fitness facility and community rooms for residents. The developments are intended to be transit oriented with direct and inviting access to all modes of transportation, including transit (e.g. BART), bus lines, trails, and bike connections. As many activities as possible should be located within easy walking distance of each other and transit. Public plazas, water features, greens, trees and other landscaping will be incorporated into the development for the benefit of the public, and to assist in creating a sense of place that will identify this new Hacienda neighborhood. Frequent use of public spaces will be encouraged through placement and design.

Streets, pedestrian paths and bike paths will contribute to a system of fully-connected and interesting routes between sites 1,2 and 3 and BART. Their design will encourage pedestrian and bicycle use by being appropriately scaled and defined by buildings, trees and lighting.

| Residential units, live-work units, and retail space **should** be well integrated into the development in a mixed-use format. We encourage permitted retail uses at these sites that encourages non-vehicular access to goods and services for future and current residents and Hacienda office workers in an effort to minimize traffic impacts, greenhouse gases and other environmental impacts.


| Design features **should** compliment the adjacent properties and draw on its surroundings to ensure compatibility. Special emphasis should be placed on set-backs, building height, massing, and scale, landscape treatments, architectural design, and color palates to ensure compatibility.

| The developments **should** minimize the impacts of noise from the adjacent freeway, BART station and major thoroughfares (Owens, Willow and Hacienda) through creative placement of buildings, landscaping and open space. All developments shall adhere to the standard conditions of approval, green-building measures and other project specific conditions and environmental mitigations that may result from the review process.

In addition to evaluating conformance with the attached standards and guidelines, individual PUD applications must be measured against the aforementioned vision through the approved PUD process as authorized by the City and reflected in the settlement agreement with Urban Habitat.

C. TOD Site Framework

C1. Hacienda Context Diagram (for reference only)

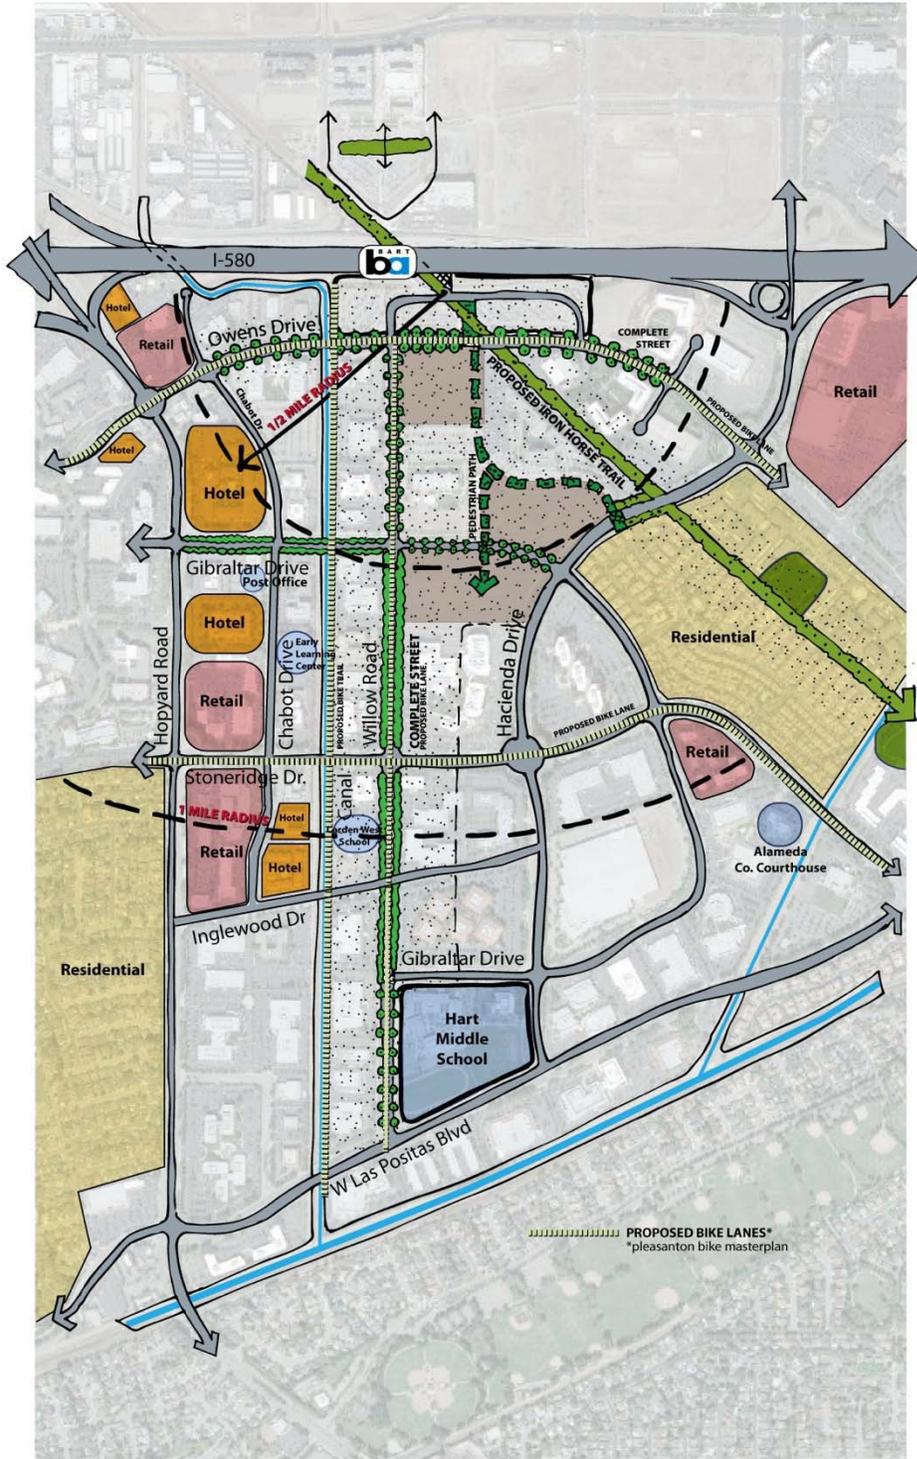



Designated and proposed bike lanes and paths identified in the Bicycle Master Plan are shown as dashed lines on Owens Drive, Willow Road, Stoneridge Drive, and along the Canal.

The Context Diagram for the Hacienda Transit Oriented District identifies existing uses and pedestrian paths. These locations would become likely destinations and paths used by new residents and workers as the mixed-use development comes on-line. The new street improvements, public spaces, retail activities and new pedestrian/bicycle pathways that accompanies new development would further enhance the connectivity to these key destinations and streets.

Key existing destinations and pathways include:

- BART Station plaza on Owens Drive at the intersection of Iron Horse Trail;
- Iron Horse Trail from the BART Plaza through the Kaiser Permanente office complex across Hacienda Drive and connecting through Owens Plaza Park toward Creekside Park;
- Residential communities located between Hacienda Drive, Owens Drive and Stoneridge Drive;
- Hotels, Post Office and neighborhood serving retail shops located along Hopyard Road between I-580 and Inglewood Drive;
- The retail shops and services located off Owens east of Hacienda Drive, and the also located at Stoneridge and Gibraltar;
- Educational facilities such as the Hacienda Early Learning Center off Chabot Drive, and the Carden West School and Hart Middle School along Willow Road;
- Alameda County Courthouse;
- The designated bikeways along Owens Drive, The Canal, Willow Road and Stoneridge.

C2. TOD Framework Diagram

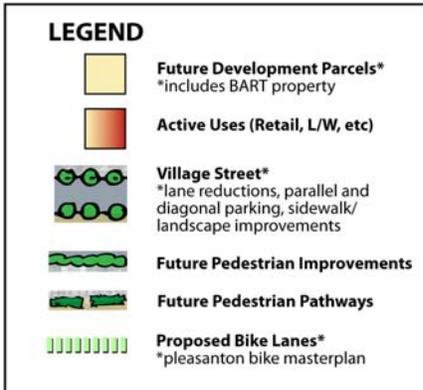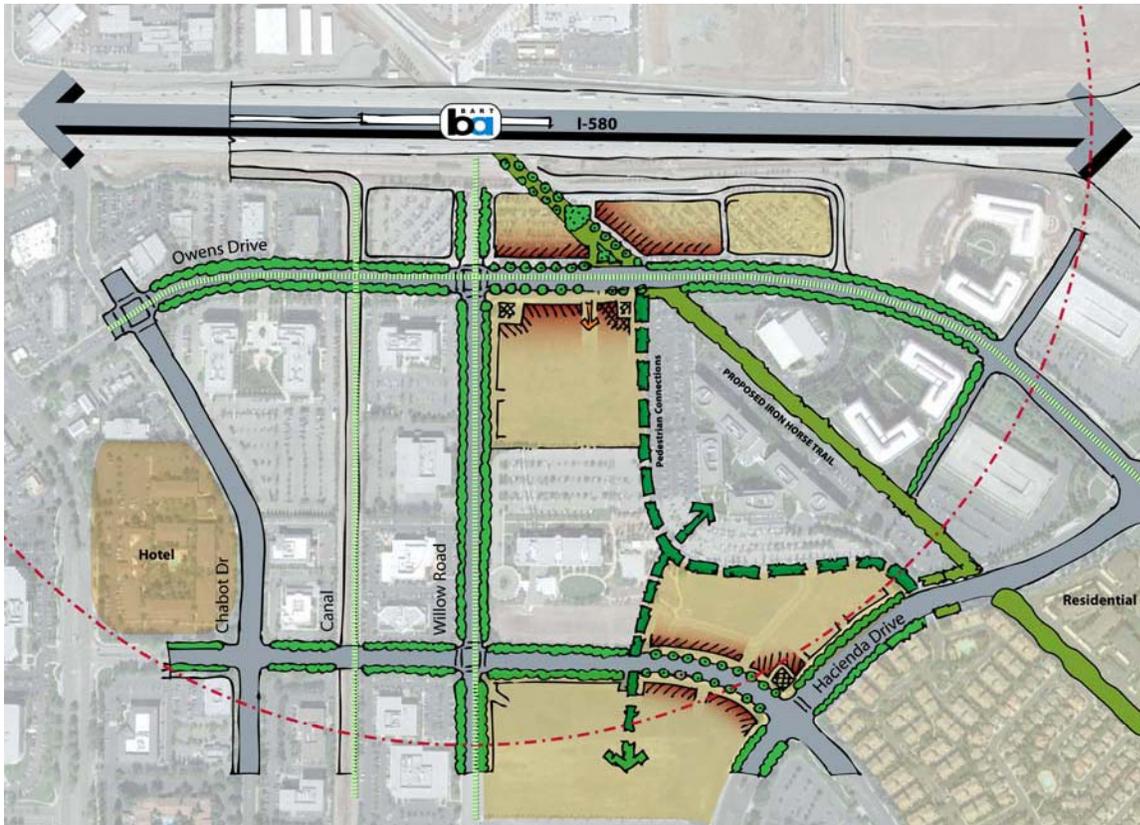

The following street and pedestrian improvements should be incorporated as site improvements when the adjoining development on sites 1,2 and 3 is constructed, and/or when the Transit Village street/path improvements can be funded *. More detailed descriptions of the recommended public improvements that can occur over time, see the applicable PART 3 Development Standards and Design Guidelines:

- Owens Drive between Willow Road and the eastern boundary of Site #1
 - Diagonal parking on the south side of the street
 - Attached widened sidewalks – both sides
 - New street and sidewalk landscaping

- Owens Drive at Iron Horse Trail
 - In coordination with East Bay Regional Park District, The City, and adjoining property owners, a new pedestrian crossing connecting the BART Plaza with a new small plaza on the south side of Owens adjacent to the Iron Horse Trail.

- ~~○ Owens Drive between Willow/Chabot Drive and between the Iron Horse Trail/Hacienda Drive~~
 - ~~● Parallel parking on both side of the streets~~
 - ~~● New street and sidewalk landscaping~~

- Willow Road from the BART Station to Stoneridge Drive
 - Parallel parking with landscaped park strip – both sides with residential uses

- Gibraltar Drive between Hacienda Drive and Hopyard-Willow Road
 - Diagonal parking from Hacienda Drive to the new pedestrian connector
 - Parallel parking from the pedestrian connector to HopyardWillow
 - Appropriate sidewalk and landscaping improvements per the street/parking section

- Pedestrian/bike pathway from Owens Drive at Iron Horse Trail to Gibraltar Drive
 - Allow for connections to the internal pedestrian circulation of Site 1
 - Allow for a connecting branch along the north side of Site 2 which connects to the existing residential communities east of Hacienda Drive and to the internal pedestrian circulation of Site 2.
 - Separated pedestrian and bike path with connections into adjoining projects, with landscaping on both sides
 - If pedestrian path to Hacienda Drive is built, coordinate on-demand pedestrian crossing location with Iron Horse Trail crossing

* Note - Improvements could be funded by grant money, the City of Pleasanton, current and future developers at the time of project construction, or a combination of these and other sources to be determined on a project by project basis.

PART 2

PUD Regulations

A. CORE PUD REGULATIONS*

These are mandatory requirements which apply to residential and mixed use development of sites 1,2 and 3.

Density: Minimum of 30 Units per Acre**

**Note: The City interprets the minimum to be an average minimum density to be met over each individual parcel.

Affordability: The greater of (a) 15% of all units, or (b) 130 units, will be made available exclusively to very-low income (50% of AMI) households. Though the affordable housing agreements entered into between the City and each developer, these affordable units will be deed-restricted in perpetuity. The affordable housing agreements will be recorded and will run with the land.

Section 8 Rental Assistance Vouchers: Through the affordable housing agreements entered into between the City and each developer, the developments will be required to accept HUD Section 8 Rental Vouchers as a means of assisting qualified applicants.

Bedroom Mix of Affordable Units: A minimum of 10% of the total affordable units will be three-bedroom units; a minimum of 35% of the total affordable units will be two-bedroom units; and the remaining affordable units will be one bedroom units.

Location of Affordable Units: Affordable units will be dispersed throughout the development.

*Note: Core PUD Regulations are from the Term Sheet of final settlement agreement issued July 20, 2010.

B. NON-CORE PUD REGULATIONS

All development applications for sites 1, 2 and 3 will be reviewed by the City through the Planned Unit Development (PUD) process, which will include review and recommendation by the Planning Commission and approval or denial by the City Council at noticed public hearings. The following non-core regulations establish numeric standards in order to realize the desired mixed-use building and TOD street character contained in the design guidelines. The City Council may exercise discretion in the application of these development standards where such proposals meet the intent and purpose of the standards. Additional non-core PUD regulations and standards are located throughout the rest of the document.

- Front Yard Minimum: See Street Sections
- Side Yard Minimums: One Side 8 ft /Both Sides 20 ft
- Rear Yard Minimum: 20ft (Note - Trash enclosures, carports, bike storage and other structures allowed per City Zoning ordinance are allowed to encroach upon rear yard).
- Site Area per Dwelling Unit: Minimum -- 1,450 sq ft (at 30 DU/ACRE)
Maximum -- 800 sq ft (at 55 DU/ACRE)
- Group Usable Open Space*: For projects up to 35 DU/ACRE – 300 sq ft. per dwelling unit; 250 sq. ft. for projects providing a public plaza/park with public access. (Note -- the area of the public plaza/park can be counted toward the project’s group usable open space requirement).
- For projects exceeding 35 DU/ACRE – 200 sq ft per dwelling units.
- Private open space, if provided, may be deducted from the group open space requirement. Each square foot of private open space shall be considered equivalent to two square feet of group open space and may be so substituted.

* See section 18.84.170 of City Zoning Code for definitions and regulations. (18.84.170 is reprinted in the Appendix) Additional Open Space regulations are located in Part 3, Section B8.

Maximum FAR: _____ Not Applicable

Maximum Height: _____ 65 ft

Minimum Height (Principal structures): 25 ft

TOD Parking Minimums**:

Residential - 1.5 spaces per unit

Live/Work - 2 spaces per unit

Visitor Parking - 1 space per every 10 units.

Non-Residential Uses - 3 spaces per 1,000 sq ft

** Additional reductions may be granted with a parking study.

C. RETAIL AND LIVE/WORK REQUIREMENTS



The combination of the Parcels 1, 2 and 3 are required to have a minimum of 10,000 s.f. of retail space. This space can be provided in any location combinations per the following:

RETAIL

- A minimum of 5,000 sq ft of retail space is required on Parcel 1.
- The primary retail locations are the intersection of Owens Drive and Willow Road, and the northeast corner of the Parcel 1 near the Iron Horse Trail pedestrian crossing.
- Retail Space on Parcel 2, if provided, should be located at the corner of Gibraltar and Hacienda Drives

LIVE/WORK

- If not used for retail, the remaining Parcel 1 street-level building frontage along Owens should provide Live/Work or other "active" spaces on the ground floor that could later be converted to retail or services assuming market conditions can support the additional commercial tenants. "Active" uses can include exercise room, management offices, building showroom or other like uses.
- 50% of the Gibraltar Drive building frontage should provide Live/Work or Retail or other "active" spacespace on the ground floor.

Note -- If Parcel 3 develops as residential and/or mixed-use, then the same requirement for Gibraltar building frontage applies to that property as the Parcel 2.

- 50% of the Gibraltar Drive building frontage is required to have Live/Work or Retail space on the ground floor.
- Retail Space, if provided, should be located at the corner of Gibraltar and Hacienda Drives

NOTE: Examples of retail and live/work configurations are shown in Part 3 Section C10.

D. ALLOWED USES

Uses -- Retail Space

- Art galleries, art supply, hobby and toy stores
- Bicycle shops/repair
- Bookstores, newsstands and music stores
- ~~Childcare centers*~~
- Clothing, shoe and accessory stores
- Convenience market
- Office supply, copying and related duplicating similar business services
- Delicatessen stores
- Drug stores and prescription pharmacies
- Farmers Market
- Financial institutions – banks, savings and loans, credit unions
- Florists
- Gift shops
- Grocery Stores
- Gyms and health clubs
- Hardware stores
- Instruction and tutoring, 20 or fewer students at any one time
- Jewelry stores
- Laundries and dry cleaners
- ~~Liquor stores*~~
- Medical and dental offices
- ~~Office supply and business machine stores~~ Personal services (spas, nail and hair care)
- Professional Offices and Services (Accountant, Lawyer, Architect, Educational/training, etc)
- Pet and bird stores
- Photographic studios
- Post offices and private mailing services
- Recreation and sports facilities, indoor, ~~limited to 20 or fewer students~~
- Restaurants, cafes, take-out, and other ready to eat food not including ~~drive-in or drive-through~~ facilities*
- Shoe or watch repair shops
- Specialty retail stores
- Sporting goods stores, no firearms sales
- Tailor or dressmaking shops
- ~~Variety stores~~ Specialty retail stores
 - Public and Community Uses:
 - Child care (licensed)
 - Community or recreation center
 - Cultural arts facility (museum, performing arts)
 - Educational facility
 - Government office that serves the public on-site
 - Police substation
 - Public library
 - Social services office center
- ~~Additional uses compatible with community serving retail and transit oriented development Uses similar in nature to any of the above subject to the approval of the Community Development Director..~~

*Conditional Uses

- Childcare centers
- Liquor stores
- Bars (as described in the Pleasanton Municipal Code)
- Wine bars and wine sales
- Any uses proposed to have normal business hours between 10 p.m. and 6 a.m.
- Uses similar in nature to any of the above, subject to a permit from the Planning Commission

Expressly Prohibited Uses:

- Cigarette stores

Allowed Uses – Live/Work Space

- Residential uses
- Art and craft work such as ceramics, painting, photography, sculpture, woodwork, and similar cottage industries
- Offices of architects, attorneys, consultants, writers, planners, CPAs, tax preparers, therapist and other small-scale professional office uses
- Hair stylists and other personal services, excluding massage
- All permitted uses in retail space
- Other small-scale, low impact uses may be allowed as determined by the Community Development Director.

·

· Conditionally Allowed Uses:

- Any uses proposed to have normal business hours between 10 p.m. and 6 a.m.


PART 3 DEVELOPMENT STANDARDS AND DESIGN GUIDELINES

A. PUBLIC STREET STANDARDS GUIDELINES

- A.a. Street trees should be planted at least every 25-35 feet on average depending on tree species, not to exceed 40 feet.
- A.b. Pedestrian-scaled lighting. 12-14' in height, should be provided on all public streets.


A1a. Owens Drive – Multi-way Boulevard (Center Median)

The following options for Owens Drive represent initial schematic designs and will need to be refined and studied further.

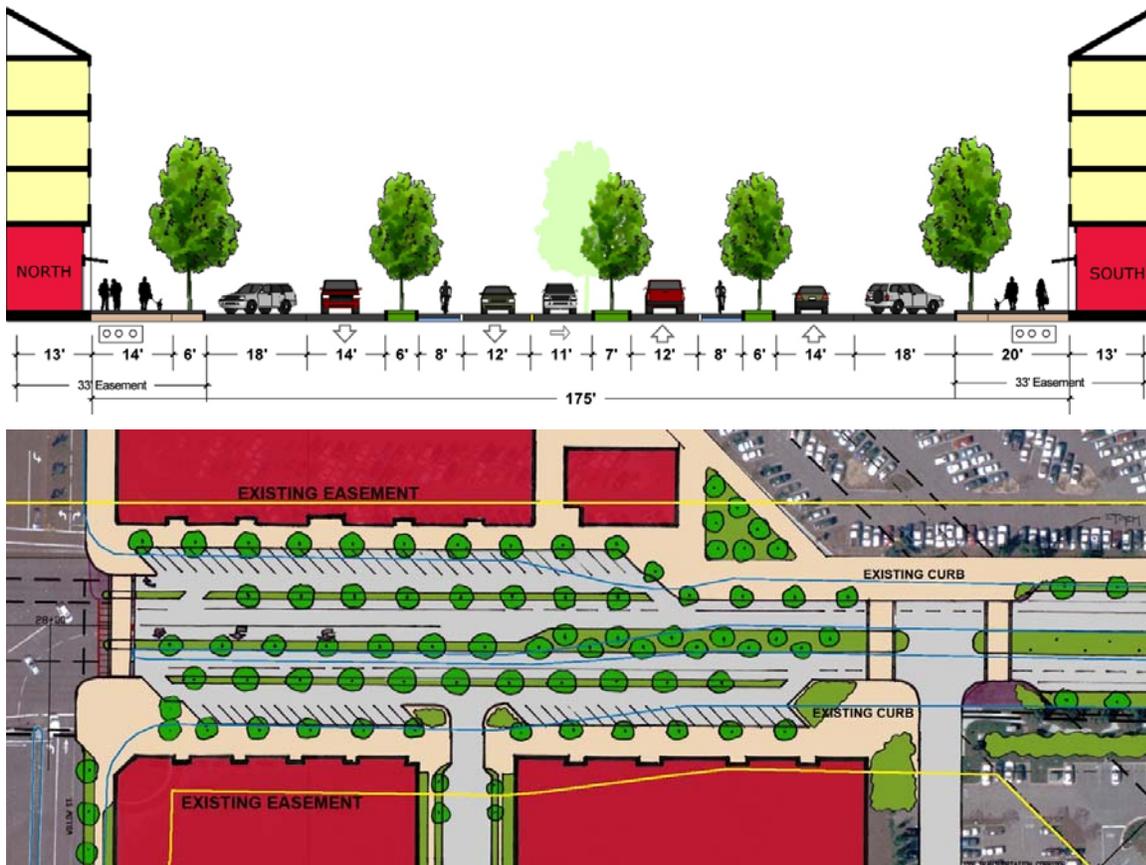

A1b. Owens Drive – Keep Center Median

The following Owens Drive section keeps the existing center median in its current location and provides diagonal parking on both sides of the street. The section also shows a multi-way boulevard on the north(west bound) side of the street.

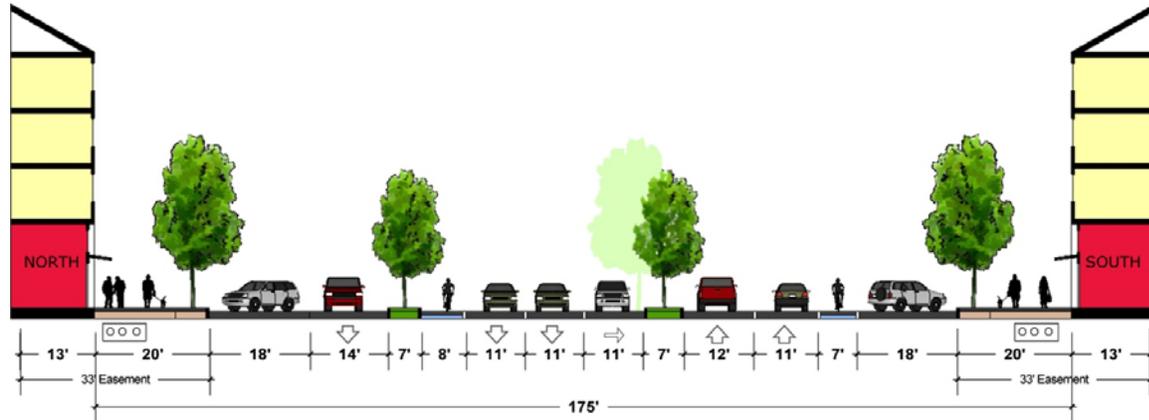

The following plan diagram shows minimal change to the configuration of Owens Drive. The plan includes diagonal parking west of the internal street and parallel parking to the east. The plan does not show the second median illustrated in the section above but does include newly striped diagonal parking on the north side of the street. The plan below could be built out as the section above, eastwest of the internal street when the north side (BART site) is developed.




A2. Gibraltar Drive

Current:

66' Curb to Curb, South Setback: Minimum 50' P.S.E from curb, North Setback: Minimum 33' P.S.E from curb. Utilities located in first 33' of North side and first 10' of South side.


At Mixed-Use or Commercial Uses:

20' setback ok on North side if utilities permit.

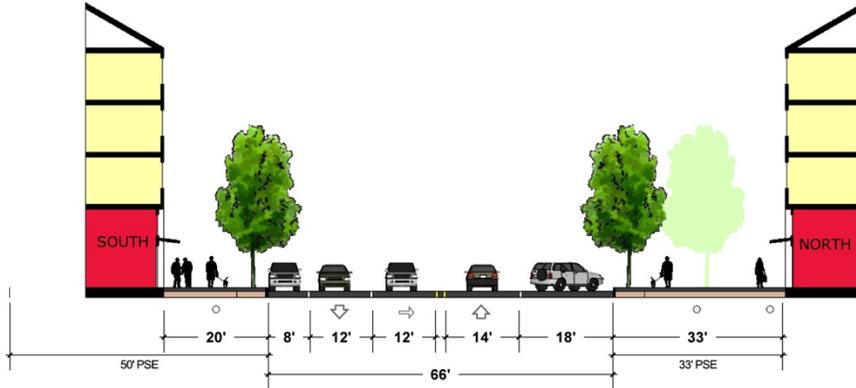


At Residential Uses:

25' setback ok on North side if utilities permit.

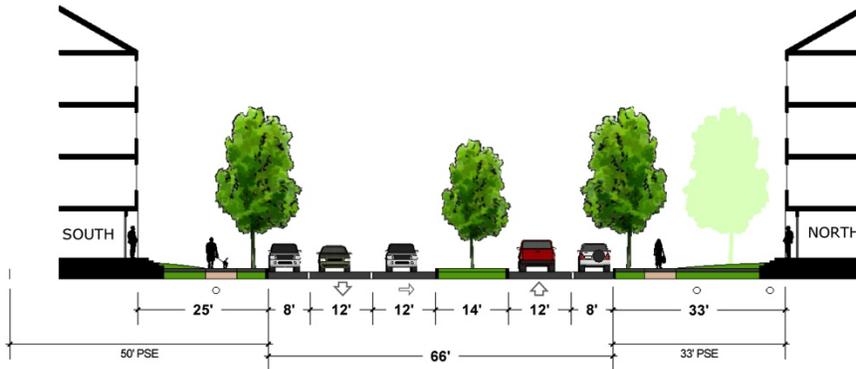

Gibraltar Drive Plan:

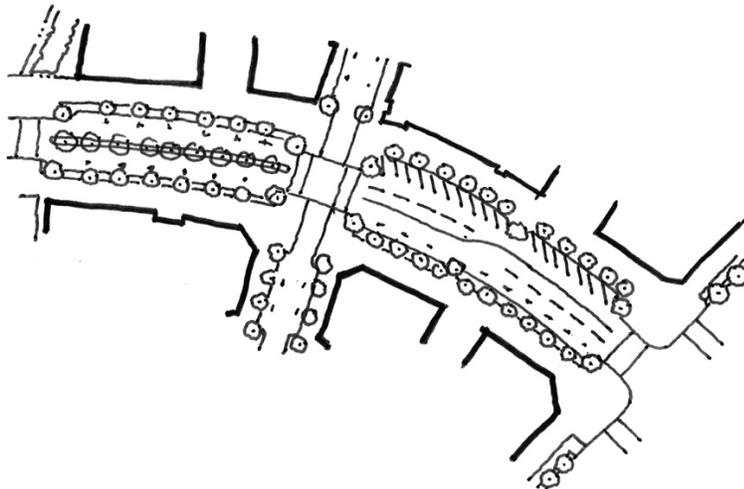


A3. Hacienda Drive (West Side)

Current:


Front Setback: Minimum 50' P.S.E from curb. (see pages 54-55 of Hacienda Design Guidelines) – Utilities are located within the first 30' of easement.

Proposed:

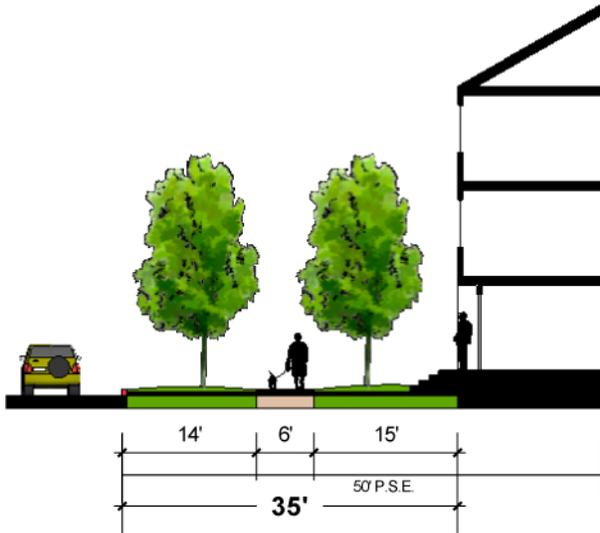

Residential Condition

Drive Lane - Curb – 14' Planting Strip – 6' Sidewalk – 15' Setback (5' encroachment ok)

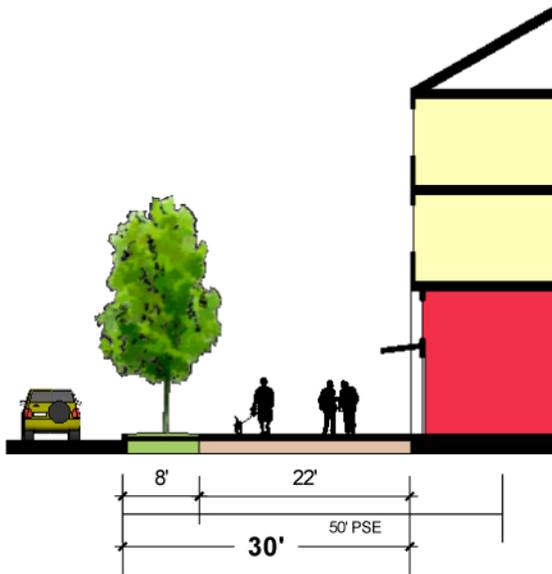

Mixed-Use Condition (First 50'-100' adjacent to Gibraltar)


Drive Lane - Curb – 6-8' Planting Strip – 6-12' Sidewalk – Zero Setback

A4. Willow Rd. (East Side)

Current:

- a. Front Setback North of Gibraltar: Minimum 33' P.S.E from curb. (see page 61 of Hacienda Design Guidelines) – Utilities located in first 12' of easement.
- b. Front Setback South of Gibraltar: Minimum 55' P.S.E from curb. (see page 56 of Hacienda Design Guidelines) – Utilities located in first 12' of easement..

Preferred (“Pleasanton” Condition)

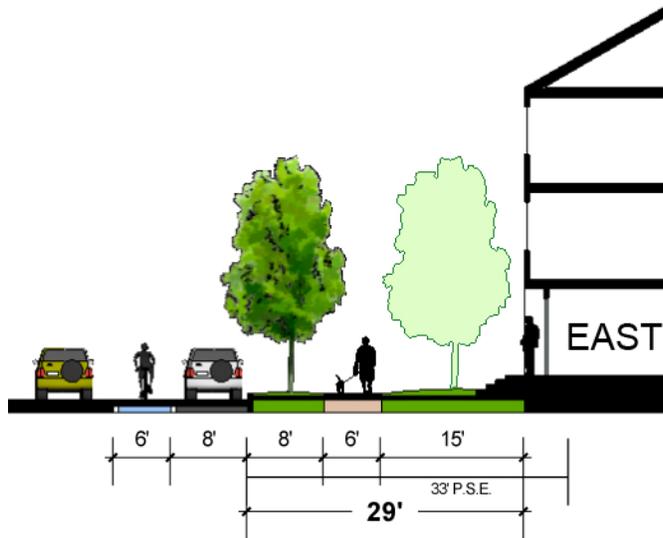


Narrow Street Section: Median – 13' Drive Lane – 6' Bike Lane - 8' Parallel Parking Lane – Existing Curb – 8' Planting Strip – 6' Sidewalk – 15' Setback at Residential Uses (5' encroachment ok)

*Building area with ground floor retail uses can encroach 10'.


Wide Street Section: Median – 10' Left Turn Lane – 10' Drive Lane – 10' Right Turn Lane – 6' Bike Lane - 8' Parallel Parking Lane – Existing Curb – 8' Planting Strip – 6' Sidewalk – 15' Setback (5' encroachment ok)

Alternative (“Urban” Condition allowed in concert with enhanced private and public open space landscaping):

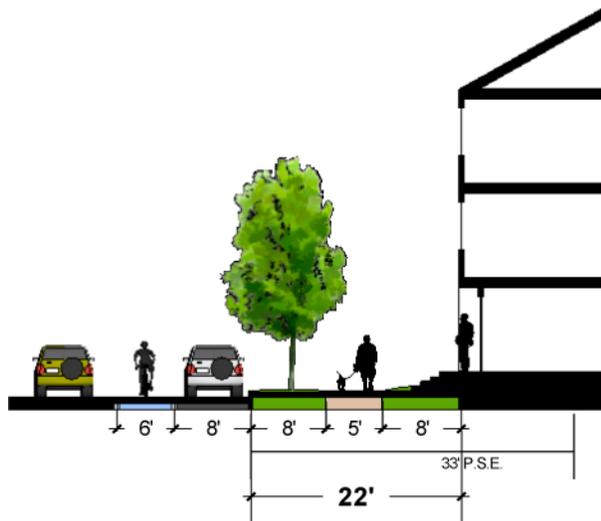

A5. Pedestrian/Bike Paths (Iron Horse Trail Connection)

The standards below are minimums for a shared-use path based on a typical class I bike path in the Pleasanton Bike Master Plan. The location of the property line can vary. All path designs, crossings and connections should be coordinated with East Bay Regional Park District's Iron Horse Regional Trail Planning and those of adjacent properties.

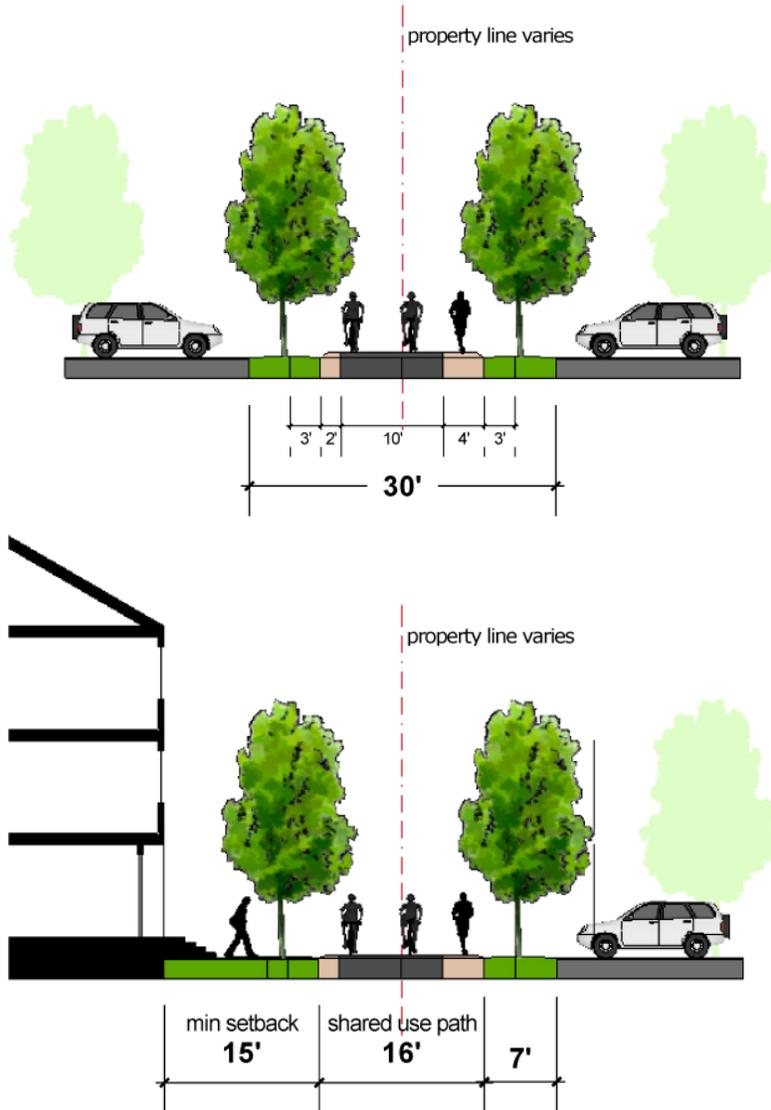

30-40' path ROW - (7' planting area, 2' decomposed granite, 10 AC or decomposed granite with adhesive, 4' decomposed granite, 7' planting area)

Note - Path ROW should span property boundaries wherever feasible.

B. SITE DESIGN AND PLANNING

B1. Site Circulation

The intent of the circulation hierarchy is to provide a quality entry experience by visitors and residents emphasizing pedestrian access over vehicular access to one's home, while allowing for convenient secondary vehicular circulation. Site circulation should facilitate pedestrian and bicycle use and will link housing, shops, work places, schools, transit, parks and other facilities essential to the daily life of residents and employees in Hacienda.

Design Guidelines

B1.a There should be a distinct hierarchy of circulation including public streets, internal "streets" or drives, pedestrian walks/paseos and alleys / parking areas. These should be arranged so that visitors and residents use the primary circulation of public streets, internal streets and drives and pedestrian walks / paseos for their primary circulation and addressing of the units and building orientation. Alleys and parking areas should not be used for primary circulation to the building/units entries, and buildings should not orient to alleys or parking areas.

Glossary:

Public Street: A public owned right of way that provides pedestrian, vehicular, and or bike access.

Internal Street/Drive): Private streets or drives that provides vehicular and pedestrian access to buildings not accesses off public streets.

Alley/Parking Area: Public or private vehicular drive that is used to access private garages, structured parking, and/or surface parking.

Paseo/Pedestrian walk: A public or private pedestrian right of way the provides access through a site or to buildings entrances.

B2. Building Orientation

Design Guidelines


The intent of the building orientation guidelines is to provide direction for site planning which places active building frontages with entries, active storefronts, and living spaces along streets and pedestrian paths and common open spaces to provide activity, safety and security through informal surveillance, in these areas.

- B2.a. Buildings should face public and internal streets and paths whenever possible to provide an attractive environment for both residents and visitors, and provide clearly identifiable addresses for units. Building fronts should face other building fronts or open spaces whenever possible, rather than sides of buildings or perimeter walls
- B2.b. On retail and live/work frontages, a minimum 75% of building façade should be fronted with active retail or live/work uses.
- B2.c. On residential frontages including public streets, internal streets, pedestrian walks/paseos, and open spaces, a minimum 75% of building façade should be fronted with livable residential space. It is particularly important for building corners to be activated with livable residential uses (minimum residential depth of 12')
- B2.d. On alley and surface parking frontages, active uses are discouraged but active uses are to be located at corners with public streets, internal streets, pedestrian walks/paseos and common open spaces.

Site Circulation and Building Orientation Diagrams


The following diagrams illustrate a variety of possible site circulation hierarchies and associated building orientations. It is anticipated that there are a wide variety of solutions including but not limited to the following.

Diagram A

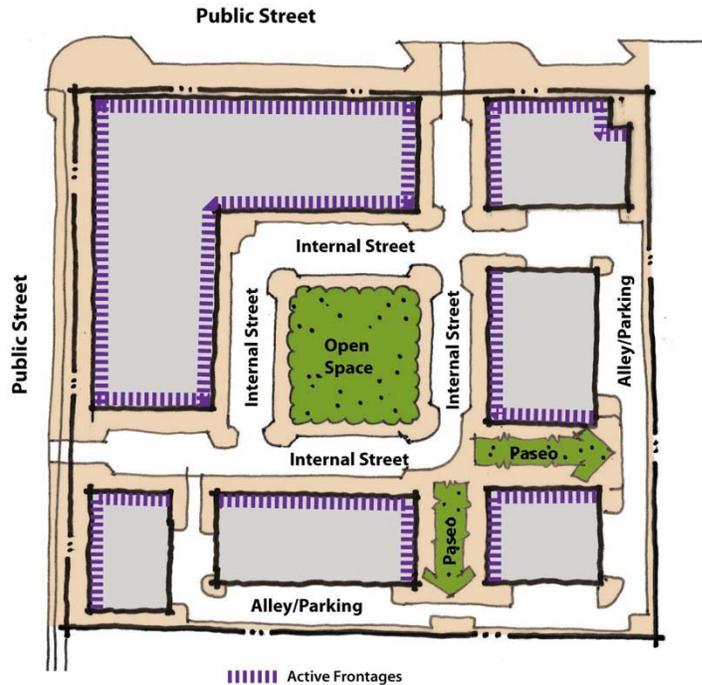


- Through internal streets around a central common open space surround by active residential facades.
- Perimeter alley access for garages and surface parking

Diagram B

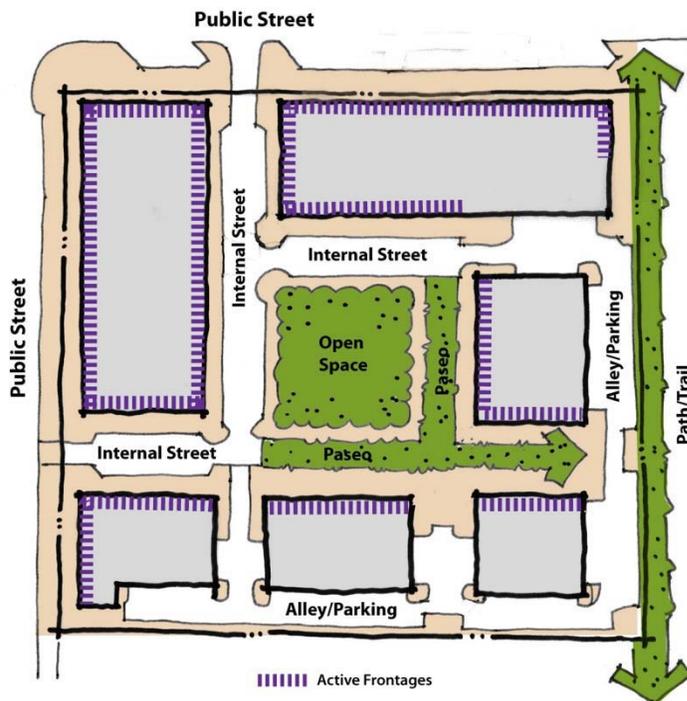


- Through internal streets around a central common open space and internal pedestrian walks.
- Perimeter alley access for garages and surface parking.
- Paseos/Pedestrian walks should connect to proposed bike/ped trail.

Diagram C

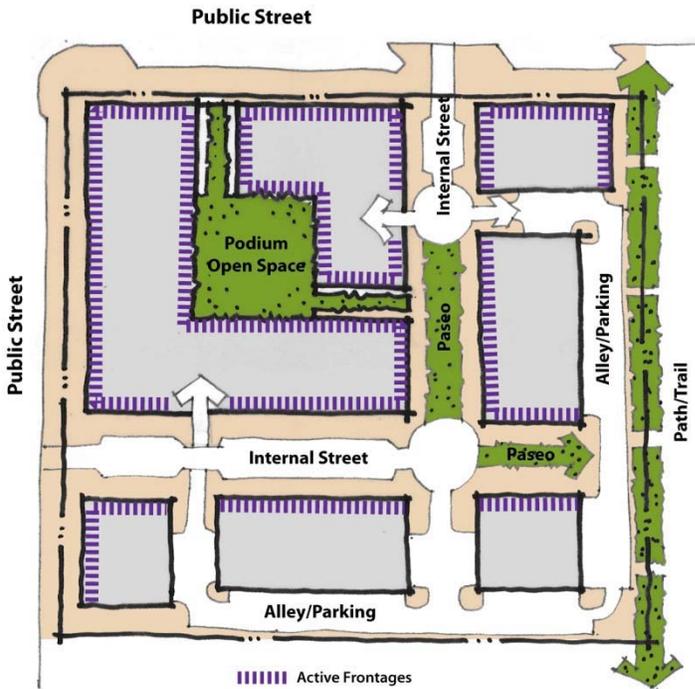



- Internal streets connected by pedestrian walks/paseos.
- Podium parking with open space above and alley accessed garages and surface parking.
- Paseos/Pedestrian walks should connect to proposed bike/ped trail.

Diagram D

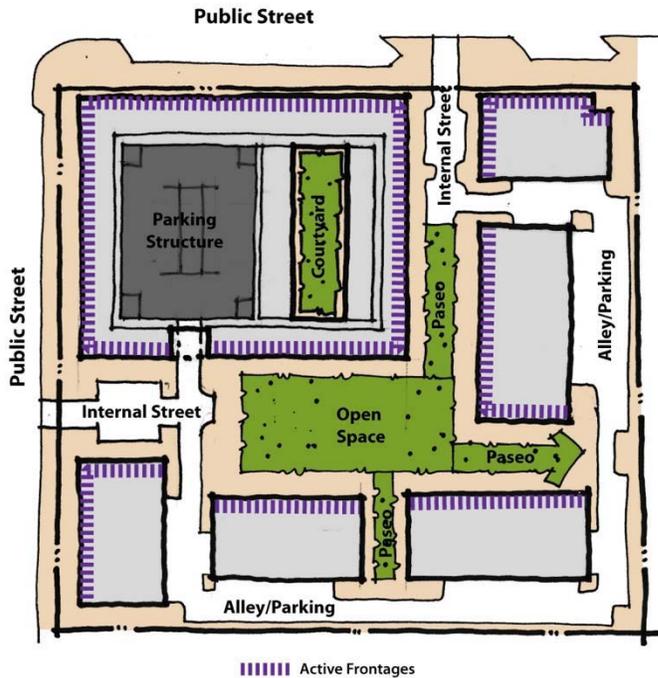

- Central Open space with internal circulation via pedestrian walks/paseos
- Minimal internal street access to residential wrap parking structure and alley accessed garage and surface parking.

B4. Internal Streets and Drives

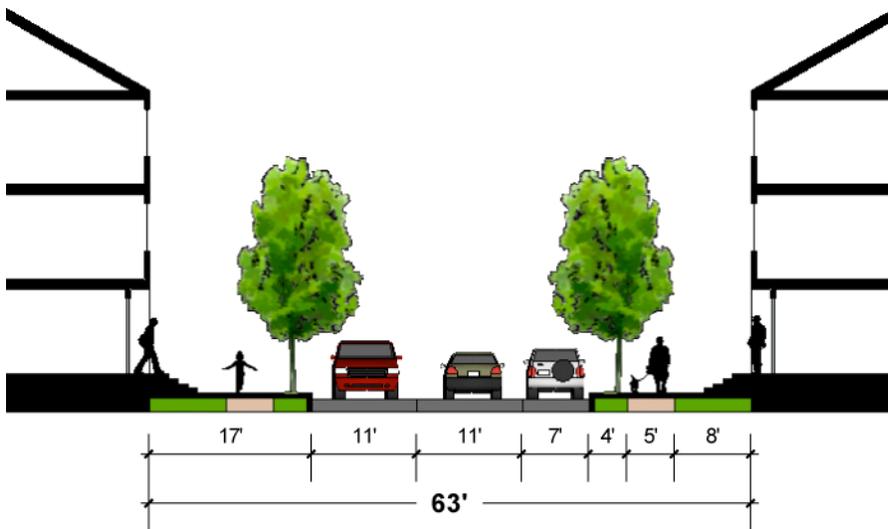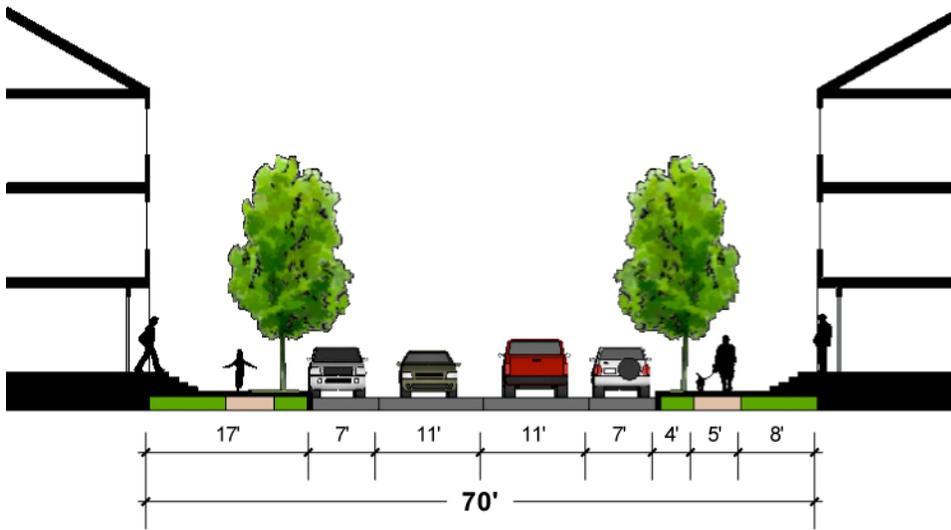



Development Standards:

- B4.1. Internal streets shall have at minimum 4 ft plantings strip and 5 ft sidewalk on each side of the street.
- B4.2. Front setbacks shall be a minimum 8 feet from the back of sidewalk providing enough room for planting and privacy while still allowing a strong relationship between the units and the street.
- B4.3. Parallel parking is required on at least one side of internal streets. Parallel parking is encouraged on both sides of internal streets.

Design Guidelines

- B4.a. Internal streets should conform to the high quality standards and be designed to resemble public streets, with sidewalks, parking and street trees.
- B4.b. Internal streets should include sidewalks, street trees, pedestrian scaled lighting, landscaping and provide a setting for social interaction and neighborhood activities.
- B4.c. Internal streets should provide through or loop circulation wherever possible rather than dead end cul-de-sacs.
- B4.d. Internal streets should connect to landmarks or amenity features such as open spaces, parks or community buildings.
- B4.e. Street trees, separated sidewalks, benches, street lamps and special paving at intersections are desired elements to promote residential scaled, aesthetic streetscapes and reinforce pedestrian activity.
- B4.f. Street trees should be planted at least every 25-35 feet on average depending on tree species, not to exceed 40 feet.
- B4.g. High branching trees should be planted to form a canopy and provide shade along streets and drives.


B5. Alleys

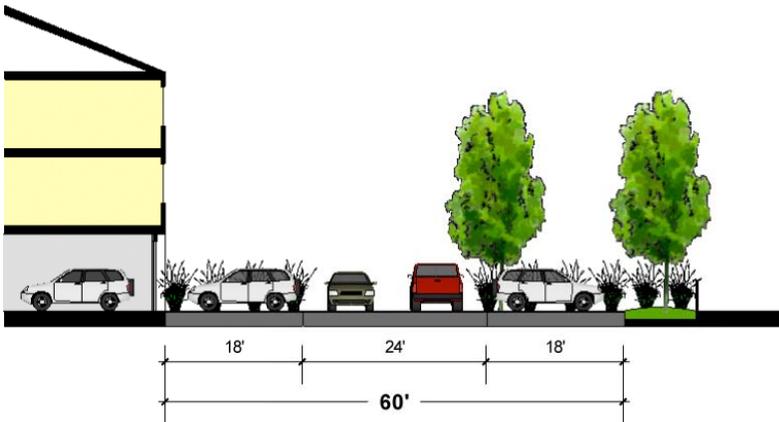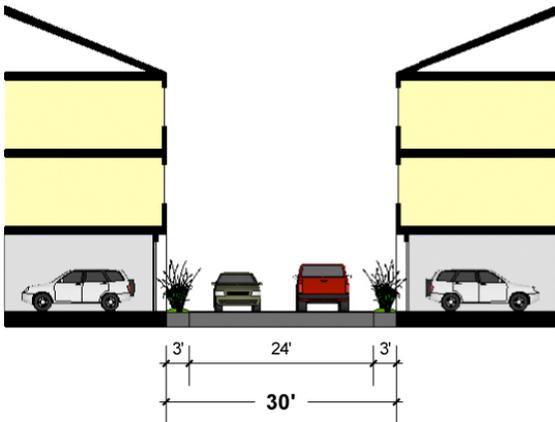

Design Guidelines:

- B5.a. Alleys should have at minimum 3 ft plantings strip adjacent to building garages
- B5.b Garages should be recesses at least 2 ft from building façade.
- B5.c Tandem parking spaces, in garage or surface, are allowed as long as they are associated with the same unit.

B6. Paseos (Pedestrian Walks)

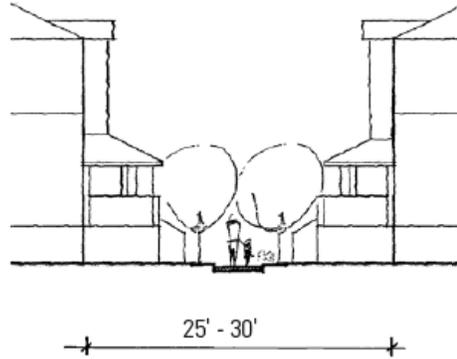

Development Standards:

- B6.1. 30 ft minimum building-to-building dimension for residential buildings. Stoops and porches are allowed to encroach up to 5 ft.
- B6.2. 40 ft minimum building-to-building dimension for mixed-use/commercial buildings. Outdoor seating areas are allowed to encroach up to 12 ft.

Design Guidelines

- B6.a. Paseo connections should be made wherever auto connections are infeasible due to project or site constraints.
- B6.b. Paseos should supplement the role of streets and drives in the circulation network.
- B6.c. Paseos should provide easy and direct access to building entries, common open space amenities and visitor parking areas.
- B6.d. Paseos should visually extend the street into an area for safe pedestrian use, with consistent street furnishings.
- B6.e. Paseos should be embellished with special paving and pedestrian-scaled lighting.
- B6.f. Buildings lining paseos should provide windows along the building face to encourage comfortable and safe pedestrian use.
- B6.g. Buildings lining paseos should be designed so that sunlight can reach the paseos during midday.
- B6.h. Paseos should be named as streets are, with buildings lining the paseos taking their respective addresses from the paseo.

B7. Parking Location and Treatment



Development Standards:



- B7.1. Parking shall be located behind buildings, below grade or, where those options are not feasible, screened by low walls and landscaping.
- B7.2. When fronting on public streets, internal streets, public walks/paseos or common open spaces, structured parking shall be wrapped or fronted with habitable uses.
- B7.3. Parking that is semi-depressed shall be screened with architectural elements that enhance the streetscape such as stoops, balcony overhangs, or decorative screening.

Design Guidelines

- B7.a. For buildings with parking accessed from the front, minimize the amount of frontage used for parking access. No more than 25% of the site frontage facing a street, internal street, or pedestrian walk/paseo should be devoted to garage opening, carports, or open/surface parking.
- B7.b. When surface parking lots are located adjacent to the street, they should be screened from the street and sidewalk by a low wall, landscape edge or combination.

B8. Open Space

TOD's are inherently built at multi-family densities to support transit. Open space is key to creating a livable community and it is essential that multifamily developments provide a connected network of specialized open spaces -- in the form of squares, plazas, greens, and play/activity areas. A well-landscaped, central public open space will become a community focal point and gathering space. The common usable open space is a subset of the overall open space requirement.

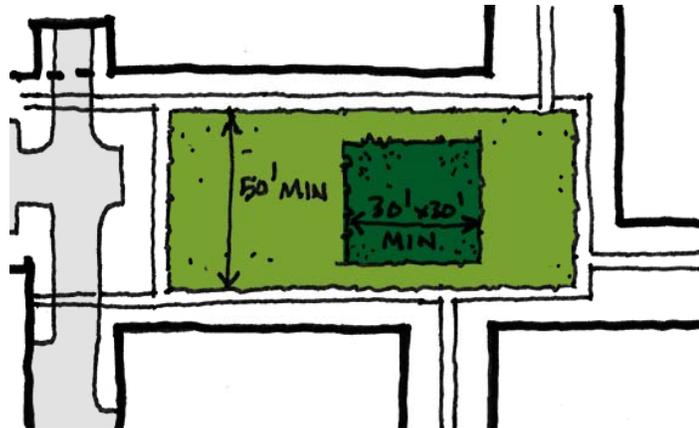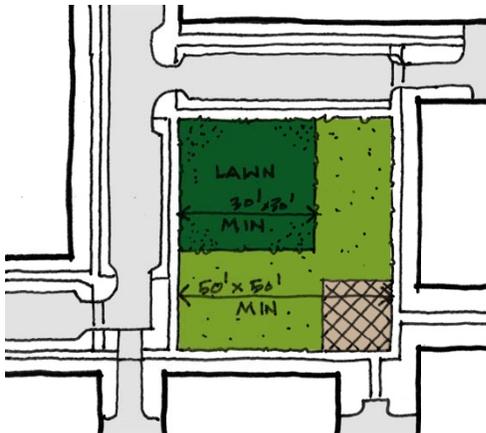

Development Standards:

B8.1. On each property, common usable open spaces shall include at least one open lawn space measuring a minimum of 30 feet in each dimension.

B8.2. One open space per each of the three parcels must have a minimum dimension of 50 ft in each direction.

B8.3. The area of public plazas and/or parks can be counted toward the project's group usable open space requirement.

Design Guidelines

- B8.a. Design of private open space should emphasize usability, with convenient access from the interior of units so that open space can be used as part of everyday living.
- B8.b. Buildings and/or streets should define the edges of and face onto common open space.
- B8.c. Common amenity areas should be appropriate to the size of the development. For larger developments, recreational facilities such as a swimming pool or tennis courts, along with picnic areas should be provided.
- B8.d. Play lots should be located in safe, convenient and highly visible locations to ensure informal surveillance by residents.

B9. Landscape

Design Guidelines

- B9.a. Drought tolerant, Bay Friendly landscaping and water-conserving irrigation methods are encouraged.
- B9.b. Landscape plans **should** incorporate seasonal variety and color to the extent possible. Tall deciduous trees should be utilized where summer shade is needed and winter solar access desired.
- B9.c. Grass lawn areas outside of common open spaces should be kept to a minimum.

B10. Site Lighting

Design Guidelines



- B10.a. Adequate lighting should be provided along sidewalks, streets, driveways, paseos and parking areas for the safety and security of residents and visitors.
- B10.b. Pedestrian scaled, post top mounted lights are recommended along public streets, interior streets, paseos, walks and common open spaces.
- B10.c. Lighting should not produce glare or be of an intensity inappropriate for a residential environment.

C. BUILDING TYPES

Introduction

Property owners and developers are encouraged to “mix and match” among the following Building Types in order to achieve the required minimum density, and to provide the varied building character desired by the City. Given the large size of the TOD Mixed Use parcels, it is anticipated that more than one building type will be built on each parcel, depending on the location, street frontage, mix of uses, and desired parking ratios. It is left to the applicant where and how to combine the Building Types listed below. If a developer wishes to incorporate a Building Type not identified in the Matrix, the City Council may review and approve new Types so long as the overall proposal conforms with the adopted TOD Standards and Guidelines.

Residential Building Matrix
(all buildings types can accommodate mixed-uses)

TYPE		DENSITY / PARCEL SIZE	PRKG. RATIO (TYPE)	STORIES	COMMENTS
ATTACHED ROW HOUSES/TUCK UNDER					
		14-25 du/ac. 3-3.5 acres (for 75 units)	1.5-2 sp/u. (tuckunder prkg.)	3 st.	Least Cost per unit as parking cost is low However greater use of land for afford. Hsg. means less mkt. rate hsg.
GARDEN STYLE APARTMENTS WITH SURFACE PARKING					
		20-25 du/ac. 3-3.5 acres (for 75 units)	1.67-1.8 sp/u. (surface prkg.)	3 st.	Least Cost per unit as parking cost is low However greater use of land for afford. Hsg. means less mkt. rate hsg.
TUCK UNDER PODIUM					
		25-40 du/ac. 1 acre min 2+ acres typ	1.5-1.8 sp/u. (surface prkg.)	3-4 st.	Least Cost per unit as parking cost is low Orientation similar to rowhouses and townhouses
TOWNHOUSE/FLATS WITH PODIUM PARKING					
		40-60 du/ac. 1.25-1.75 acres (for 75 units)	1-1.5sp/u. podium struct. st. - visitor	4-5 st.	Most typical high density type Best with low parking ratio (1:1)
RESIDENTIAL WRAP BUILDING WITH PARKING STRUCTURE					
		40-70 du/ac. 2-3 acres 100-150 units minimum	1-1.67sp/u. multi-lvl. structure st. - visitor	3-4 st. 5 st. poss.	Most cost effective, but generally requires larger project to justify parking structure; 1 larger site.
RESIDENTIAL BUILDINGS WITH OFF SITE PARKING DISTRICT					
		50-80 du/ac. 2-3.5 acres for 100-150u	1-2 sp/u. off site multi-lvl. Struct. st. - visitor	3-4 st. 5 st. poss.	Satellite Parking Structure Limited site prkg. Allows for greater density Cost effective struct. Prkg. due to size effic. Of scale

C1. Attached Rowhouse/Townhouses (14-25 du/ac)



Attached rowhouse/townhouses are units typically situated in a row of at least three or more units where there is no separation between units. These can be designed as either front- or rear-loaded.

Density/Parcel Size	Parking Ratio (Type)	Stories	Comments
14-25 du/ac 3-3.5 acres (for 75 units)	1.5-2 sp/u. (tuckunder parking)	3 story	Least cost per parking space Most land area per unit

Features:

Generally uniform massing within individualized appearance

Front-loaded with the garage facing the street or "front" of the property, or rear-loaded with garage facing the rear of the property

Greater efficiency of space without side yards and may provide for greater densities on larger sites

Private open space for each unit is typically provided by a front patio or balconies

Typical built density: between 14-25 units per acre

The design focus should be on an overall building: attached units in a row

Units organized around "public" spaces and sites around common spaces

C2. Garden Style with Surface parking (20-25 du/ac)



Garden Style apartments are stacked flat units arranged on a single level and surrounded by units either above or below each unit.

Density/Parcel Size	Parking Ratio (Type)	Stories	Comments
20-25 du/ac 3-3.5 acres (for 75 units)	1.67-1.8 sp/u. (surface parking)	3 story	Least cost per parking space Most land area per unit

Features:

Typically 2-4 stories of single-level units stacked on top of each other


Individual unit access can be from either common interior corridor or by discrete exterior entrances

Typical built density: 20-30 units per acre

The design focus is as a whole building, less on individual units

Common open space is typically provided in assembled areas of courtyards or common ground space

C3. Tuck Under Podium (25-40 du/ac)

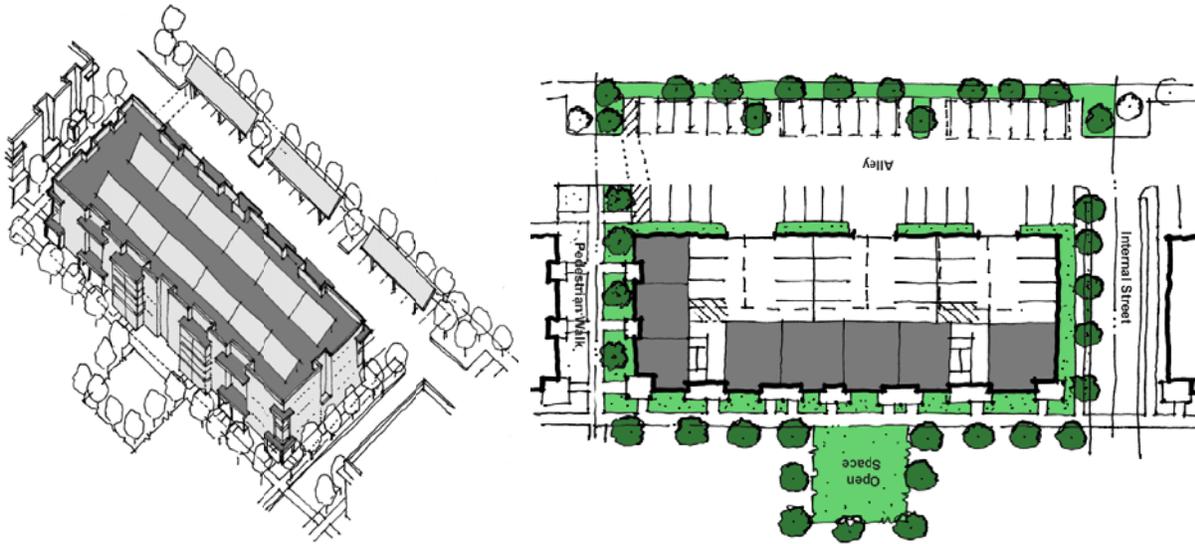

Flats are typically stacked over small shared garages with ground floor units “lining” or fronting the streets, pedestrian walks or open spaces.

Density/Parcel Size	Parking Ratio (Type)	Stories	Comments
25-40 du/ac typically 1 acre minimum with 2+ acres typical	1.5-1.8 sp/u. (surface parking)	3-4 story	Orientation similar to rowhouses and townhomes

Features:

Typically 3-4 stories in height, including parking garages.

Typically will have 1/2 to 2/3 surface parking.

Midpoint density: greater than garden apartments while not requiring a concrete podium for parking.

Has similar orientation to rowhouses or townhouses with ground floor units facing streets, pedestrian paths and open spaces and garages accessed by alleys.

Ground floor units have individual entries while upper units use shared stairs or elevator with corridor.

Common open space in pedestrian walks or paseos.

C4. Townhouses/Flats with Podium Parking (40-60 du/ac)



Townhouses or stacked flats are units built over a submerged or partially-submerged parking garage or "podium," rather than with individual garages.

Density/Parcel Size	Parking Ratio (Type)	Stories	Comments
40-50 du/ac 1.25-1.75 acres (for 75 units)	1-1.5 sp/u. (structured podium parking)	4-5 story	Most typical high density type Best with low parking ratio

Features:

Typically 3-4 stories or more in height above a parking podium (garage)

May or may not have additional surface parking

Often appear more urban in appearance with raised stoops above a partially submerged parking podium


Typical built density: 30-50 units per acre

The design focus is as an entire building, not individual units

Common open space is typically provided.

Parking podium can be at grade with residential/retail wrap

C5. Residential Wrap Building with Parking Structure (40-70 du/ac)

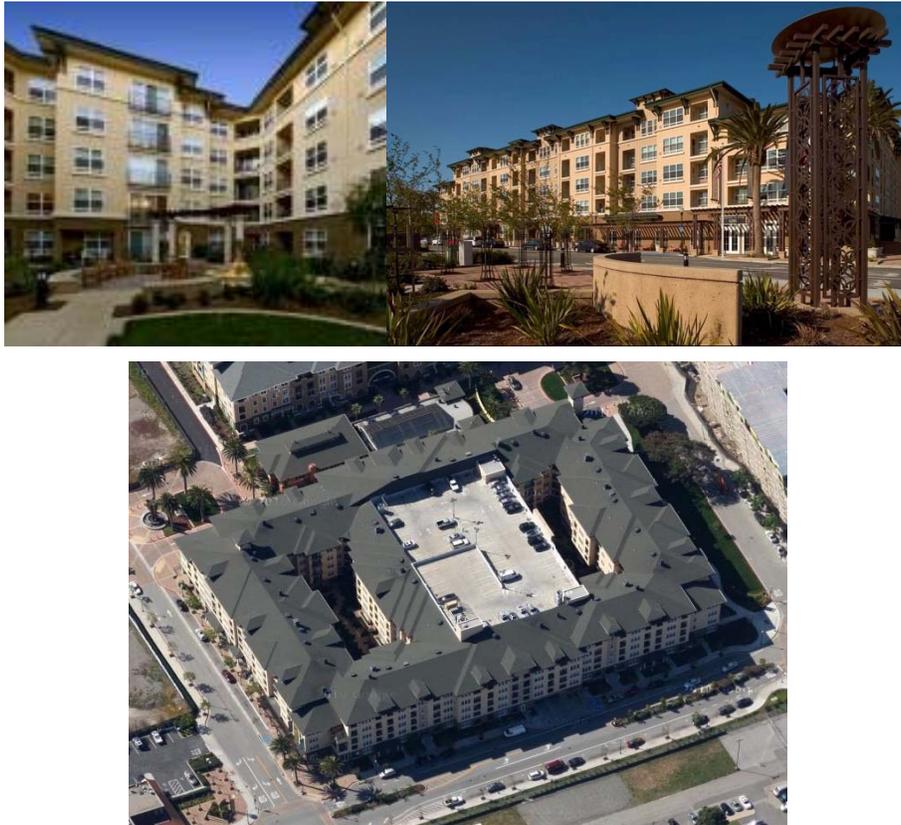

Density/Parcel Size	Parking Ratio (Type)	Stories	Comments
40-70 du/ac 2-3 acres (100-150 unit minimum)	1-1.67 sp/u. (multi-lvl parking structure)	3-4 story	Most cost effective Requires larger project/site

Features:

Typically 3-4 stories or more in height

Stacked flats wrapped around parking structure or free standing around ground level courtyard.

Typically built density: 40-60 plus units per acre

The design focus is as an entire building or group of buildings.

Urban in appearance due to height, mass, and scale

Common open space is typically provided.

Greener, heavily landscape, courtyards at grade

C6. Residential Buildings with Off-Site Parking District (50-80 du/ac)



Density/Parcel Size	Parking Ratio (Type)	Stories	Comments
50-80 du/ac 2-3.5 acres (100-150 unit minimum)	1-2 sp/u. (multi-lvl offsite parking structure)	3-4 story, 5 possible	Walk to offsite parking, limited onsite parking Allows greater densities without added height

Features:

Typically 3-4 stories or more in height, stacked flats or combination of flats and townhouses.

Parking is supplied by on-site spaces along with spaces located in adjacent parking garage. Parking space can be assigned.

Often integrated into mixed-use neighborhoods.

Parking structure serves multiple users from several nearby buildings.

Greener, heavily landscape, courtyards at grade

C7. Mixed-Use Buildings

Features:

Vertical mix of uses (ground floor retail/live/work with offices or residential above)

Entries and storefronts facing onto street or plazas

Parking usually located in podium structures

Typically taller first floor ceiling heights



Vertical Mixed Use (Retail/Office)



High Density Mixed Use



Mixed Use



Mixed Use

C8. Retail Buildings (Stand Alone)




Features:

Surface parking located behind/adjacent to retail building.


Entries and storefronts facing onto street or plazas

Typically 20-30 feet in height with high ceilings.

C9. Live/Work

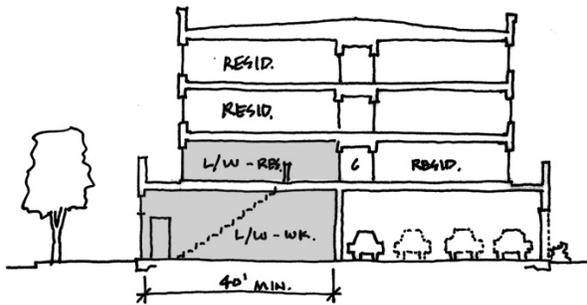

Live/Work space connected to residence above

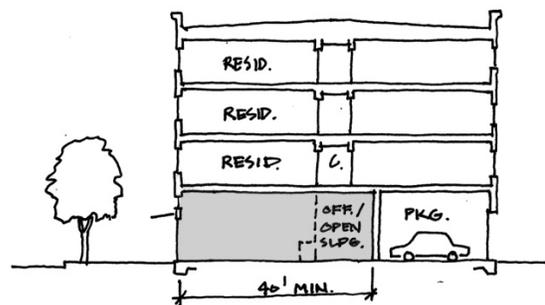

Live/Work space with studio residence

Features:

2 types – Ground floor residential units with extra “flex room” used for small business and/or a retail space; or a street-level work/shop space connected to upper-level residential rooms.

Entries and storefronts facing onto street or plazas

Tenant parking usually located in podium structures or in private garages accessed from the rear of the building, with visitors served by on-street parking.

Typically taller first floor ceiling heights or double height spaces.

C10. Example Retail Configurations (Listed stats do not include BART parcel)

<p>1. 5-6,000 sq ft @ one corner w/ Live/Work along the rest of frontage</p>	
<p>2. 10,000 sq ft @both corners w/ Live/Work between</p>	
<p>3. 18-20,000 sq ft Along Owens</p>	

<p>4. 25-30,000 sq ft with Major Tenant (Grocery, Pharmacy)</p>	
<p>5. 10-12,000 sq ft 60' deep @ Willow w/ Live/Work along the rest of frontage</p>	
<p>GIBRALTAR RETAIL 5-10,000 sq ft @ corner w/ Hacienda</p>	

D. ARCHITECTURAL FEATURES

D1. Residential Entries

Development Standards:

- D1.1. All ground floor units (within 5 ft of grade) shall have entries onto street, internal street, paseo(walk), or open space. (including corridor buildings)

Design Guidelines

- D1.a. Entries should be the predominant feature of front facades, and should have a scale that is in proportion to the size of the building and number of units being accessed. Larger buildings should have a prominent, centralized building entrance.
- D1.b. Building fronts should include porches, unit entries, and architectural detailing.
- D1.c. Building entries should be the prominent feature of the front facade and identify access to individual units.
- D1.d. Building entries that face a public street, drive or common space should be the first choice for entry location.
- D1.e. Porches and balconies that face streets should be semi-transparent and be incorporated into the materials and design of the building.
- D1.f. Porches may encroach 5' into the front yard setback.
- D1.g. Front yard patios can be used and be part of entry path or a separate space. Patios should have a low fence, screen, or hedge no higher than 3 ft to transition between public and private areas.

D2. Window Treatments

Design Guidelines


- D2.a. Windows are a very important element of building form and should be well organized on a building facade to create a rhythm or pattern.
- D2.b. Windows should emphasize vertical massing of buildings.
- D2.c. Windows should have a hierarchy of sizes emphasizing the function of the living spaces and views while allowing for privacy of neighboring properties.
- D2.d. Windows should be well detailed and consistent with the architectural design of the building.
- D2.e. Windows should be "punched" in from the exterior building wall or should be defined by well-designed trims. Trim material should contrast with wall materials.
- D2.f. Windows should overlook streets and open spaces to provide "eyes on the street" and ensure clear views for safety.

D3. Roofs and Parapets

Design Guidelines

- D3.a. Use eave and parapet details to provide a strong skyline or silhouette and at visual interest to the roof line.
- D3.b. Emphasize vertical proportions of individual units rather than horizontal building massing.
- D3.c. Rooflines should correspond to variations in building massing and articulation with bays, gables, dormers and strong eave elements.
- D3.d. Roof elements should be varied to minimize the appearance of mass and bulk.
- D3.e. Gable roofs or bays with parapets are encouraged to emphasize vertical proportion and break up the massing of large hipped roofs.

D4. Retail and Live/Work Storefronts

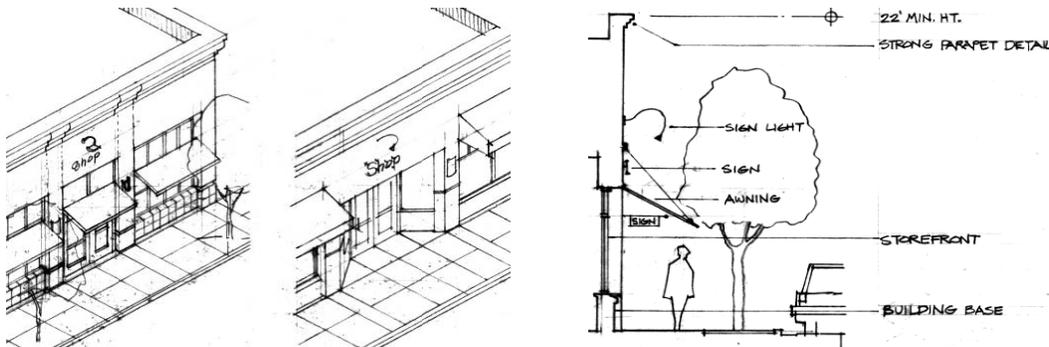

Development Standards:

- D4.1. Retail and service uses shall have a minimum interior 15 ft clear floor to ceiling height.
- D4.2. Live/work uses shall have a minimum 12 ft clear floor to ceiling height for two story units and 15' clear floor to ceiling for one story units- to allow for mezzanine.
- D4.3. Storefronts shall have a minimum depth of 40 ft, and 60 ft at corners.

Design Guidelines

- D4.a. Large display windows (large panes or divided lites) are strongly encouraged.
- D4.b. Clear glass should be used. Colored or reflective glass is not appropriate.
- D4.c. A well designed and/or decorative material base is desired at display windows.

- D4.d. Entries and window displays should have consistent materials and detailing.
- D4.e. Entries should be located at corners or intersection whenever possible.
- D4.f. Recesses are encouraged to identify entries and provide weather protection.
- D4.h. Awnings, canopies, trellises and/or other shade devices over storefront windows and entries are strongly encouraged to provide signage, shade, and pedestrian cover.
- D4.i. Individual awnings that articulate the building façade rhythm are desired in lieu of long continuous horizontal awnings.

D5. Gateway Corners



Design Guidelines

- D6.a. Buildings located on the corner of two public streets, end of a major pedestrian or shared path, and/or end of an important vista should have unique architectural element.
- D6.b. A unique architectural element can be a change in height, a definition of a public plaza, and or a change in architectural style.

D6. Building Signage

Design Guidelines

- D6.a. Site signage should feature individually formed lettering and should have an artistic design element as well as addressing way finding.
- D6.b. Backlit box signs are not permitted, except when required by the Fire Department.
- D6.c. Site signs should have design features consistent with the buildings in the development, and should be integrated into the site development and landscaping.
- D6.d. Attractive signage directories are encouraged to help provide way finding within the development.

D7. Bike Parking

Development Standards:

- D7.1. Weather protected and secure bike parking spaces shall be provided for a minimum of 30% of the maximum occupants per dwelling unit. Bike parking can be grouped into one structures or located in private garages.

D8. Utility and Trash Enclosures

Design Guidelines

- D8.a. Opaque screen trash and recycling enclosures or individual containers for each unit **should** be provided.
- D8.b. Enclosures should be located to minimize any conflict with individual units, common open space areas, or neighboring properties.
- D8.c. Trash enclosures are required to be of durable materials such as concrete or concrete block and finished to integrate with the building design.
- D8.d. Trash enclosures **should** be sized and designed to accommodate the City's source separated recycling program.
- D8.e. Buildings should be organized so the impact of servicing functions and utilities on streets and along pedestrian paths is minimal.
- D8.f. Utilities should be incorporated into the design of the building and integrated into landscaped areas to minimize noise and visual impact. Options may include insets into building facades or integration into low wall standards.

D9. Residential Storage

Development Guidelines:

- D9.1. Residential Storage: Each unit should have at least 40 cubic feet of enclosed storage area. Storage space should be outside of unit but does not need to be adjacent to unit.

D10. Compatibility with Surrounding Development

Development Guidelines:

- D10.1. While the densities restrictions and requirements on the three parcels are consistent it is generally desired that the design provides features which are generally compatible with residential neighborhoods across the major arterial or street. Features which assist in creating compatibility may include:
 - additional landscaping including large trees within the setbacks.
 - architectural treatments such as change in material at the upper floors, bays which extend a story lower to visually lower the facade, or building step backs at the top floor are all potential treatments which may be considered.

- The corners of Gibraltar and Hacienda Drive should maintain the "gateway" treatments within the design guidelines

PART 4

PROCESS

A. PLANNED UNIT DEVELOPMENT (PUD)

Applications for development of each of the three sites will be processed through the City's established Planned Unit Development review process. Criteria for review of these projects shall include the Core Development Standards, Non-core Development Standards, and Design Guidelines as included in these Transit Oriented Development Standards and Guidelines and as required by the City's Settlement Agreement, relative to Urban Habitat v. City of Pleasanton.

The City will conduct environmental analysis of each project in accordance with CEQA and CEQA Guidelines.

PART 5

APPENDIX

Usable Open Space Code:

The following was taken from the City of Pleasanton Zoning Code and is located here for reference only. Should the code change, the updated code shall be followed.

18.84.170 Usable open space.

- A. Each dwelling unit in the RM and C-C districts shall have group or private usable open space as prescribed in the zoning schedule codified in table 18.84.010 of this chapter, provided that in the RM district each dwelling unit shall have private usable open space of at least the minimum area specified by subsection C of this section. Group and private usable open space may be combined to meet the requirements. Each square foot of private usable open space shall be considered equivalent to two square feet of group usable open space and may be so substituted. All required usable open space shall be planted area, or shall have a dust-free surface, or shall be water surface, provided that not less than 10 percent of the required group usable open space at ground level shall be landscaped with trees and other plant materials suitable for ornamentation. No required usable open space shall be located in a parking area, driveway, service area, or required front yard, or shall have a slope greater than 10 percent.
- B. Group usable open space shall have a minimum area of 300 square feet and a rectangle inscribed within it shall have no dimension less than 15 feet. Required usable open space may be located on the roof of an attached garage or carport, but not more than 20 percent of the required space shall be located on the roof of a building containing habitable rooms.
- C. Private usable open space located at ground level shall have a minimum area of 150 square feet and a rectangle inscribed within it shall have no dimension less than 10 feet. The minimum area of aboveground-level space shall be 50 square feet and a rectangle inscribed within it shall have no dimension less than five feet. Private usable open space shall be adjacent to, and not more than four feet above or below the floor level of the dwelling unit served. Not more than 50 percent of ground-level space may be covered by an overhang, balcony, or patio roof. Aboveground-level space shall have at least one exterior side open above railing height.
- D. Private, ground-level, usable open space on the street side of a structure shall be screened from the street.
- E. Usable open space shall be permanently maintained by the owner in orderly condition. (Prior code § 2-5.45)